



HEXAGON HEAD BOLTS & SCREWS

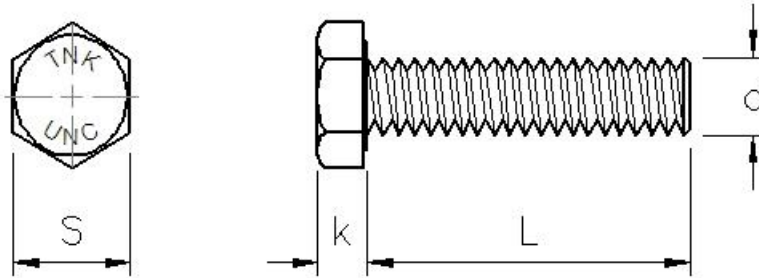

Standard	ASME B18.2.1 1996
Hardness	70-100 HRB
Surface Treatment	Black Oxide
Strength Class	4.8
Code	2Z
Brand	TNK

d Thread Size	Threads Per Inch		S nom	K nom	L (inch)
	UNC	UNF			
1/4"	20	28	11.11	3.96	1/2" - 6"
5/16"	18	24	12.7	5.16	
3/8"	16	24	14.28	5.94	
7/16"	14	20	15.87	7.14	
1/2"	13	20	19.05	7.93	
9/16"	12	18	20.63	9.12	

HEXAGON HEAD BOLTS & SCREWS

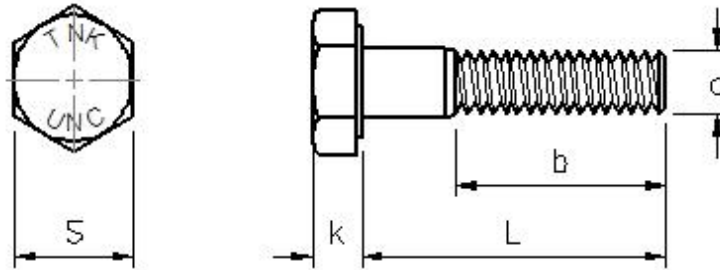

Standard	ASME B18.2.1 1996
Hardness	70-100 HRB
Surface Treatment	Black Oxide
Strength Class	4.8
Brand	TNK

d Thread Size	Threads Per Inch		S nom	K nom	b when		L (inch)
	UNC	UNF			L 6 in. and shorter	L Over 6 in.	
1/4"	20	28	11.11	3.96	19.05	25.4	1/2" - 6"
5/16"	18	24	12.7	5.16	22.22	28.57	
3/8"	16	24	14.28	5.94	25.4	31.75	
7/16"	14	20	15.87	7.14	28.57	34.93	
1/2"	13	20	19.05	7.93	31.75	38.1	
9/16"	12	18	20.63	9.12	34.93	41.28	